





# REI HALF DOME 2 HC

## SETUP INSTRUCTIONS

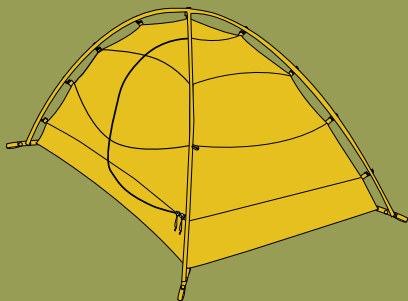


### CHECK INSIDE THE TENT BAG FOR:

- Tent body and rainfly
- 2 poles w/center hub
- 6 stakes
- 1 pole-repair tube
- Pole bag and stake bag
- 4 gylines with tighteners



### POLE ALIGNMENT

- Lay out the main tent body. If it's windy, stake corners tautly.
- Lay the poles on top of the tent; the REI logo on the hub should point up.
- Place the pole with blue tips diagonally across the tent: 1 tip at the tent's head end, 1 at the foot end.
- Set all pole tips into the outer grommets on the 4 corner tabs; raise the tent. Stake corners.
- Clip the small metal hook (on top of the tent) into the hub. Hook all tent clips to the poles.



### CORNER CONNECTION

- Drape rainfly over the tent so that the orange corner tabs on the fly and tent body align.
- Find rip-and-stick wraps on the fly's underside (located at guyout points). Connect them to the poles.
- At each corner tab, slip the fly's grommet onto the bottom of the pole tip. Tighten all buckles.
- Stake down each vestibule loop and pull cord through cleat until taut; wedge cord into the cleat's slot to "lock" it in place. (See above right.)



### LOCK VESTIBULE CLEATS

- Prop open fly's ceiling vents.
- To boost ventilation, unzip the fly near the doors and roll up the fabric. Or, remove the fly.
- If the tent body is slack, move pole tips to inner grommets. Increase rainfly tension by tightening buckles. (See center illustration.)
- How to use extra gylines in the wind: Tie free end of gylines to a guyout point on the fly. Pull a loop of line out from the line's plastic tightener. Stake down the loop and slide the tightener toward the fly.

### 3 WAYS TO GET REPLACEMENT PARTS:

REI STORES • WWW.REI.COM • 1-800-426-4840

