





# REI HALF DOME 4 HC

## SETUP INSTRUCTIONS

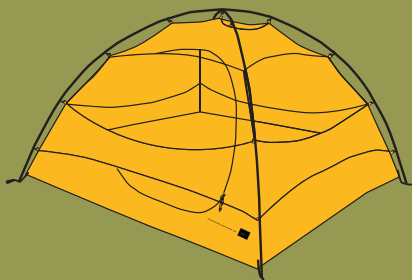

### CHECK INSIDE THE TENT BAG FOR:

- Tent body and rainfly
- Pole-repair tube
- 2 poles w/center hub
- Pole bag and stake bag
- 6 stakes
- 4 guylines with tighteners




#### POLE ASSEMBLY

- Lay out the main tent body. If it's windy, stake corners tautly.
- Lay poles on top of tent; the flat side of the hub should point up.
- Insert all tent-pole tips into the outer grommets on the corner-tabs. Raise the tent. If you didn't do so already, stake down the corners.
- Clip the small metal hook (on top of the tent) into the hub. Hook all tent clips to the poles.



#### CORNER CONNECTION

- Drape rainfly over the tent so that the orange corner tabs on the fly and tent body align.
- Find rip-and-stick wraps on the fly's underside (located at guyout points). Connect them to the poles.
- At each corner tab, slip the fly's grommet onto the bottom of the pole tip. Tighten all buckles.
- Stake down each vestibule loop and pull cord through cleat until taut; wedge cord into the cleat's slot to "lock" it in place. (See above right.)

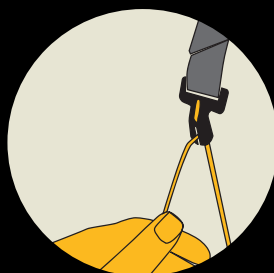

#### VESTIBULE CLEAT LOCK

- Prop open fly's ceiling vents.
- To boost ventilation, unzip the fly near the doors and roll up the fabric. Or, remove the fly.
- If the tent body is slack, move pole tips to inner grommets. Increase rainfly tension by tightening buckles. (See center illustration.)
- How to use extra guylines in the wind: Tie free end of guyline to a guyout point on the fly. Pull a loop of line out from the line's plastic tightener. Stake down the loop and slide the tightener toward the fly.

### 3 WAYS TO GET REPLACEMENT PARTS:

REI STORES • WWW.REI.COM • 1-800-426-4840

